

PM Wide-Band Coupler

Features:

Low insertion loss
High Efficiency
stability and reliability


Application:

Wave Fiber Laser
High-Power Laser Equipment
Experimental tests and other areas

Parameter	Value	Unit	Note
Center wavelength	1310	nm	
Operating bandwidth	± 15	nm	
Configuration	1x3		
Coupling ratio	EVEN		
IL	5.6	dB	
PDL	≤ 0.15	dB	
Directivity	≥ 50	dB	
Package size ($\Phi \times L$)	2.4×25	mm	
Fiber type	SMF-28e, 250um bare fiber		
Operating Temperature	-55 to +85	°C	
Storage Temperature	-	°C	
Fiber length	≥ 1.2 m	m	

Note: The above specification is without connector.

Mechanical Dimension

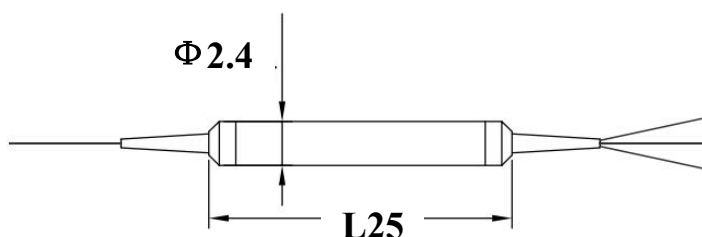

Ordering Information

GCSSC-O-1x3-1310-EVEN-0-01-2.4x25-1m